

# SYSTEM BS

RATED VOLTAGE  
~ 240V

**Technical data:**

Standards:  
**BS88: Part 4**  
**IEC 60269-4-1**

Breaking capacity:  
~ **200kA**  
Rated voltage:  
~ **240V**

Characteristic:  
**aR**

**Application:**





Fuse-links of system BS are mounted by screws to busbars.

Size	In (A)	Type	Code No.	Operating I <sup>2</sup> t-value (A <sup>2</sup> s)	Power dissipation (W)	Char.	Packaging (pcs)	Weight (g)
<b>BS8</b>	6	BS8UQ/38/6A/240V	004750001	9	1	aR	10	5.5
	10	BS8UQ/38/10A/240V	004750002	22	2.5	aR	10	5.5
	12	BS8UQ/38/12A/240V	004750003	32	2.5	aR	10	5.5
	16	BS8UQ/38/16A/240V	004750004	100	2.5	aR	10	5.5
	20	BS8UQ/38/20A/240V	004750005	160	4	aR	10	5.5
<b>BS17</b>	25	BS17UQ/41/25A/240V	004750106	250	4	aR	10	31
	32	BS17UQ/41/32A/240V	004750108	450	5	aR	10	31
	35	BS17UQ/41/35A/240V	004750109	600	5	aR	10	31
	50	BS17UQ/41/50A/240V	004750112	1.400	7	aR	10	31
	63	BS17UQ/41/63A/240V	004750115	2.200	9	aR	10	31
	80	BS17UQ/41/80A/240V	004750119	3.800	10	aR	10	31
	100	BS17UQ/41/100A/240V	004750122	7.500	10	aR	10	31
	125	BS17UQ/41/125A/240V	004750125	7.500	16	aR	10	31
<b>BS38</b>	160	BS38UQ/59/160A/240V	004750227	16.000	17	aR	10	180
	200	BS38UQ/59/200A/240V	004750233	20.000	28	aR	10	180
	250	BS38UQ/59/250A/240V	004750236	40.000	28	aR	10	180
	315	BS38UQ/59/315A/240V	004750239	75.000	35	aR	10	180
	355	BS38UQ/59/355A/240V	004750242	100.000	35	aR	10	180
	400	BS38UQ/59/400A/240V	004750244	160.000	40	aR	10	180
	450	BS38UQ/59/450A/240V	004750245	220.000	42	aR	10	180
	400	BS38TUQ/59/400A/240V	004750344	80.000	60	aR	5	370
<b>BS38T</b>	500	BS38TUQ/59/500A/240V	004750346	170.000	64	aR	5	370
	630	BS38TUQ/59/630A/240V	004750349	300.000	75	aR	5	370
	710	BS38TUQ/59/710A/240V	004750352	460.000	77	aR	5	370
	800	BS38TUQ/59/800A/240V	004750353	600.000	82	aR	5	370



ULTRA QUICK

**Dimensions:**

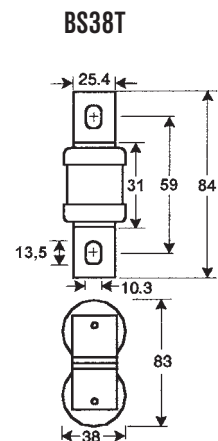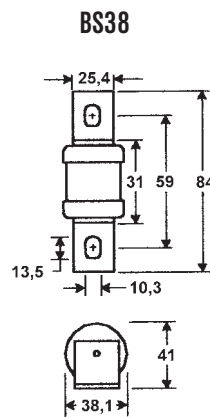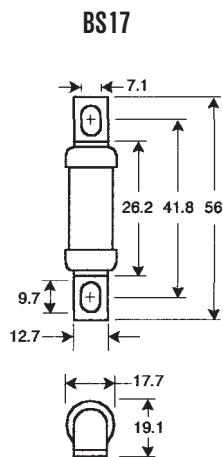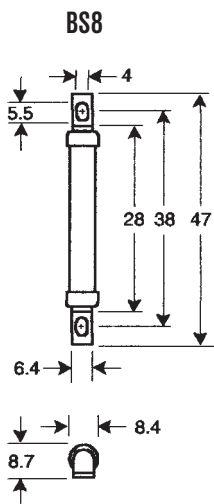

RATED VOLTAGE  
~690V

**Technical data:**

Standards:  
**BS88: Part 4**  
**IEC 60269-4-1**

Breaking capacity:  
~**200kA**  
Rated voltage:  
~**690V**

Characteristic:  
**aR**

**Application:**

Fuse-links of system BS are mounted by screws to busbars.

Size	In (A)	Type	Code No.	Operating I <sup>2</sup> t-value (A <sup>2</sup> s)	Power dissipation (W)	Char.	Packaging (pcs)	Weight (g)
<b>BS8</b>	6	BS8UQ/64/6A/690V	004750501	12	2	aR	10	8
	10	BS8UQ/64/10A/690V	004750502	48	3	aR	10	8
	12	BS8UQ/64/12A/690V	004750503	65	3	aR	10	8
	16	BS8UQ/64/16A/690V	004750504	110	7	aR	10	8
	20	BS8UQ/64/20A/690V	004750505	220	7	aR	10	8
<b>BS17</b>	25	BS17UQ/63/25A/690V	004750606	250	7	aR	10	42
	32	BS17UQ/63/32A/690V	004750608	350	11	aR	10	42
	35	BS17UQ/63/35A/690V	004750609	200	9	aR	10	42
	40	BS17UQ/63/40A/690V	004750610	300	9	aR	10	42
	45	BS17UQ/63/45A/690V	004750611	450	11	aR	10	42
	50	BS17UQ/63/50A/690V	004750612	600	11	aR	10	42
	56	BS17UQ/63/56A/690V	004750613	1.500	14	aR	10	42
	63	BS17UQ/63/63A/690V	004750615	750	12	aR	10	42
	71	BS17UQ/63/71A/690V	004750617	950	17	aR	10	42
	80	BS17UQ/63/80A/690V	004750619	1.500	20	aR	10	42
<b>BS17D</b>	90	BS17DUQ/70/90A/690V	004750721	4.500	19	aR	5	90
	110	BS17DUQ/70/110A/690V	004750723	6.500	27	aR	5	90
	120	BS17DUQ/70/120A/690V	004750724	3.100	32	aR	5	90
	140	BS17DUQ/70/140A/690V	004750726	3.800	36	aR	5	90
	160	BS17DUQ/70/160A/690V	004750728	5.700	46	aR	5	90
<b>BS38</b>	160	BS38UQ/83/160A/690V	004750628	25.000	26	aR	5	240
	180	BS38UQ/83/180A/690V	004750631	13.500	40	aR	5	240
	200	BS38UQ/83/200A/690V	004750633	18.500	40	aR	5	240
	250	BS38UQ/83/250A/690V	004750636	37.500	48	aR	5	240
	315	BS38UQ/83/315A/690V	004750640	77.000	55	aR	5	240
	350	BS38UQ/83/350A/690V	004750642	105.000	55	aR	5	240
<b>BS38T</b>	200	BS38TUQ/83/200A/690V	004750933	23.000	42	aR	5	450
	225	BS38TUQ/83/225A/690V	004750935	40.000	42	aR	5	450
	315	BS38TUQ/83/315A/690V	004750939	91.000	51	aR	5	450
	355	BS38TUQ/83/355A/690V	004750943	140.000	54	aR	5	450
	400	BS38TUQ/83/400A/690V	004750944	72.500	85	aR	5	450
	450	BS38TUQ/83/450A/690V	004750945	105.000	90	aR	5	450
	500	BS38TUQ/83/500A/690V	004750946	150.000	100	aR	5	450
	630	BS38TUQ/83/630A/690V	004750950	310.000	100	aR	5	450
700	BS38TUQ/83/700A/690V	004750952	420.000	120	aR	5	450	



**Dimensions:**

